GruppoNueva



New Collection

We Are Earn Reputation By Trying To Do Hard Things Well In Ceramic Industry Our Brand Is Are Voice And A Product Is A Souvenir. Today **GruppoNueva** is the most famous brand among the architectures and interiors who loves ggressive creatively in glazed porcelain tiles. **GruppoNueva** is founded in 2016, the main goal is to carve out a leading role in the tiles market as a first company which is providing extra ordinary surfaces Glazed Vitrified tiles, Polished Glazed Vitrified tiles, laminate wooden finish, sugar finish, metallic finish, carving finish and high glossy. Within just short period, "**GruppoNueva**" has earned its reputation among the customers just because of aims to satisfy the needs of an individual, not only Providing Quality Insurance but are also providing cost effective tile with the help of Well Organized Marketing & Distribution Channel among the India & Overseas Market.



POLISHED

New Collection

Elevate your space with our stunning Polished Collection, a range of Carving tiles designed to redefine luxury and sophistication in any environment. Crafted with meticulous attention to detail, each tile in this collection exudes a captivating brilliance that instantly transforms your floors and walls into works of art.



Embrace Versatility







DIMENSION AND



RESISTANCE TO Mm³ DEEP ABRASION



FROST RESISTANCE



STAIN RESISTANCE



WATER ABSORPTION



N/mm² TENSILE STRENGTH



CRAZING RESISTANCE



SLIP RESISTANCE



RESISTANCE TO



THERMAL RESISTANCE



CHEMICAL RESISTANCE




ENLARGED ESCALE

INDEX

Polished Finish



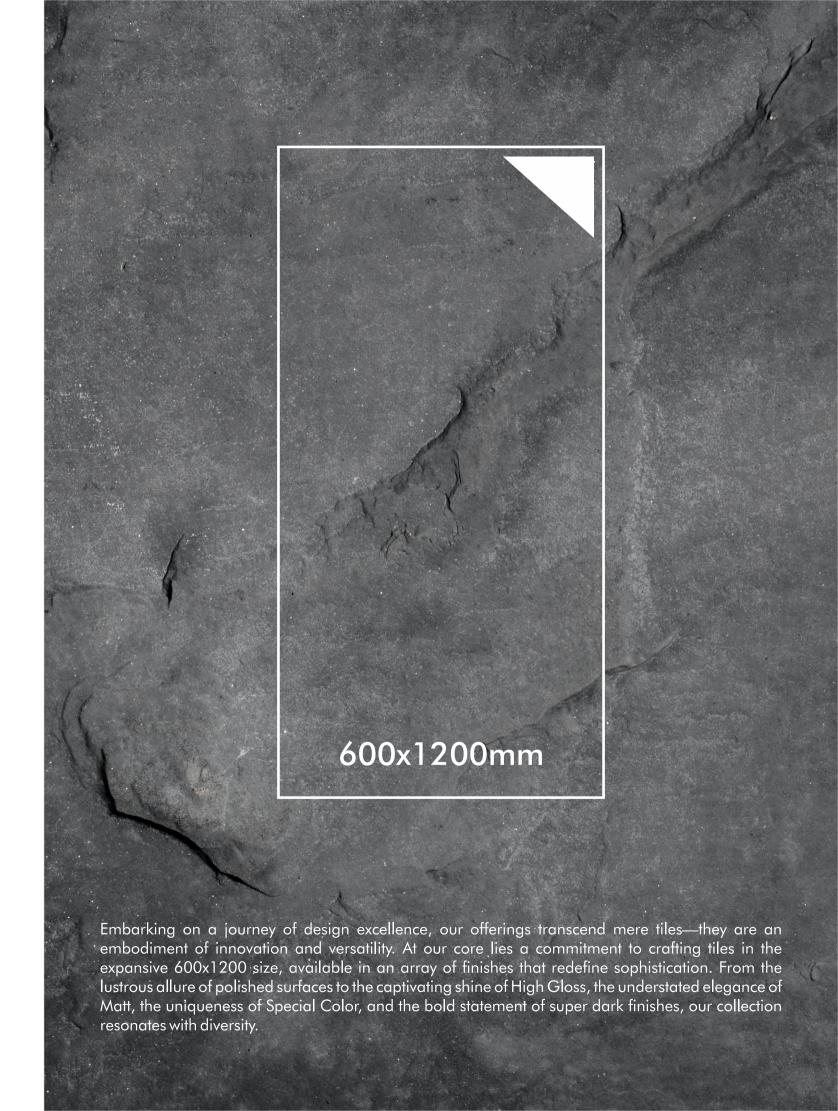



PO

SH

ED

Polished tile designs exude an irresistible allure, boasting a smooth and reflective surface that captivates with its elegant gleam. These tiles, meticulously crafted, harness a sophisticated charm that effortlessly enhances any space. Their lustrous finish not only adds a touch of luxury but also amplifies the room's brightness by reflecting light, creating an illusion of expansiveness. Whether adorning floors or walls, polished tiles infuse a sense of refinement and timelessness, transforming interiors into captivating havens of modern sophistication and understated opulence.





BONNIE WHEAT









COSMIC PINK











LILIYANA BEIGE











LILIYANA GREY











LORENZO BEIGE









LORENZO DOVE











LUNA GOLD



Finish Random Polished 600x1200 mm 04 09 mm








LUNA SILVER



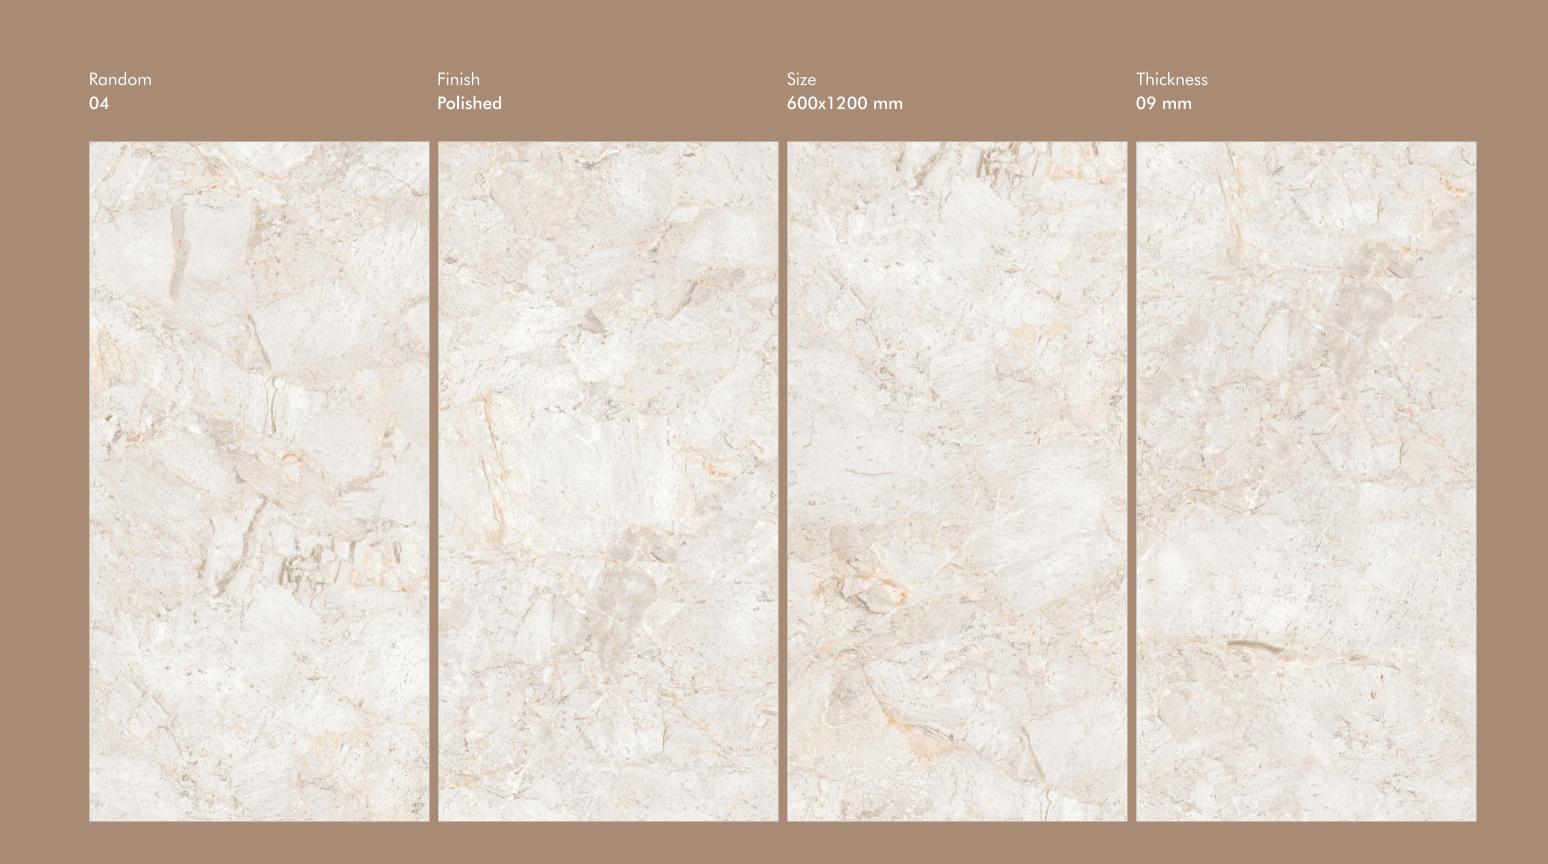








PARLATO BEIGE



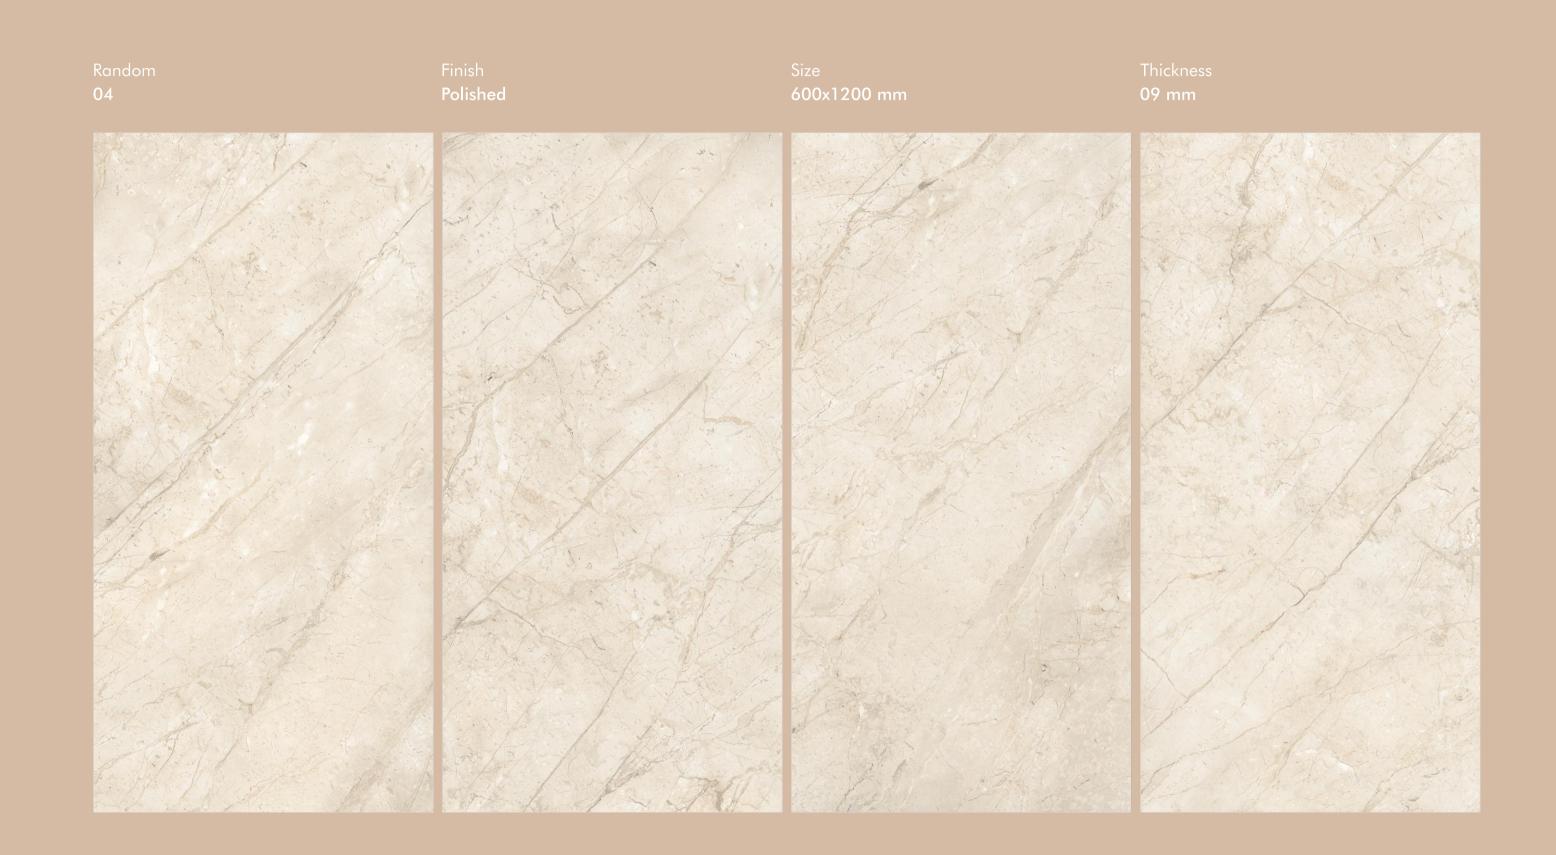







PERLATO SAHARA







RIVA 600x1200 mm BEIGE



RIVA BEIGE





RIVA IVORY

600x1200 mm



RIVA IVORY








RIVA PEARL


600x1200 mm



RIVA PEARL

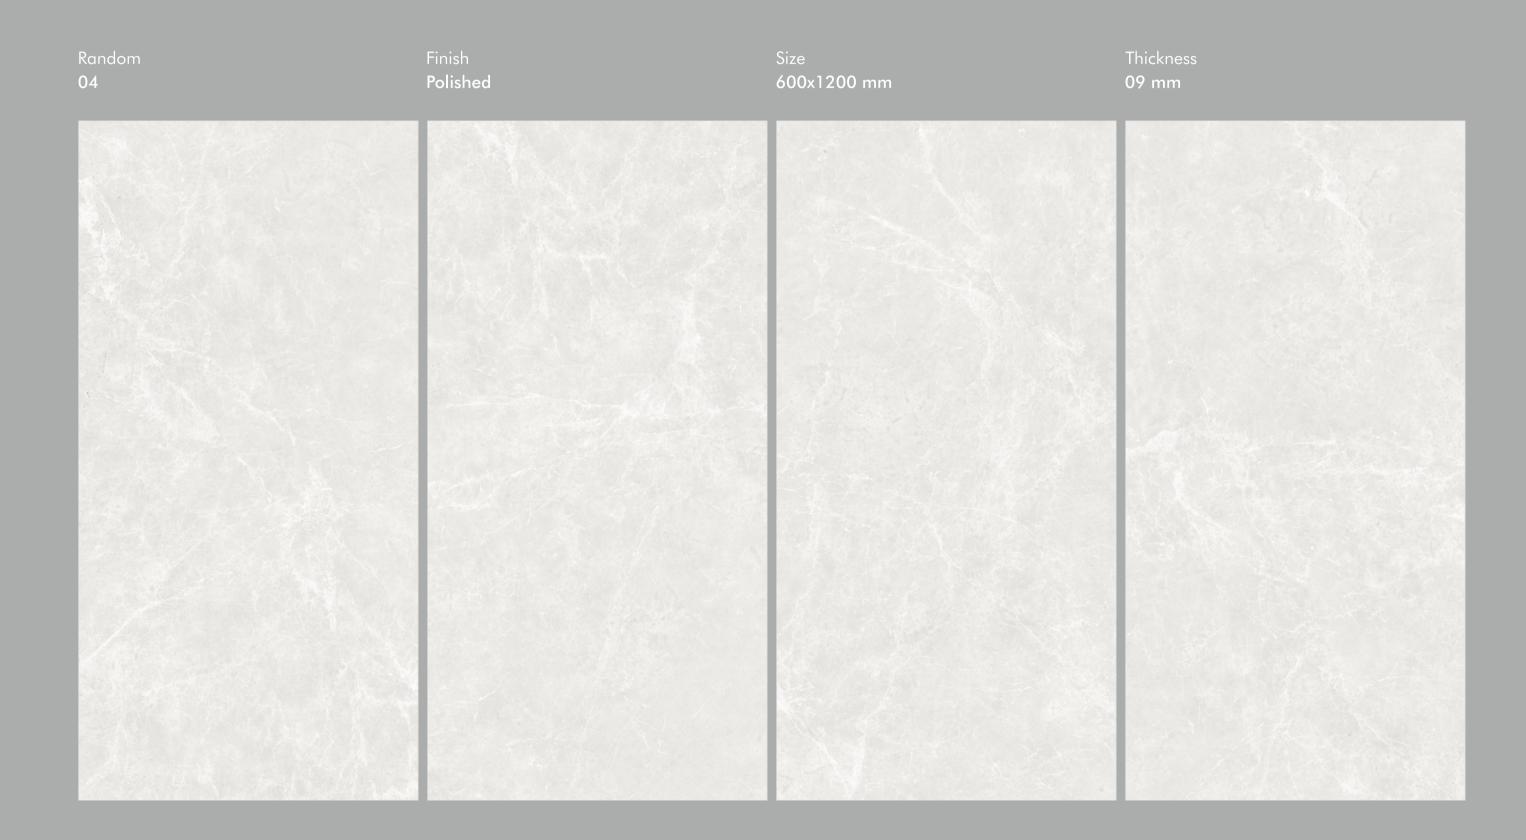



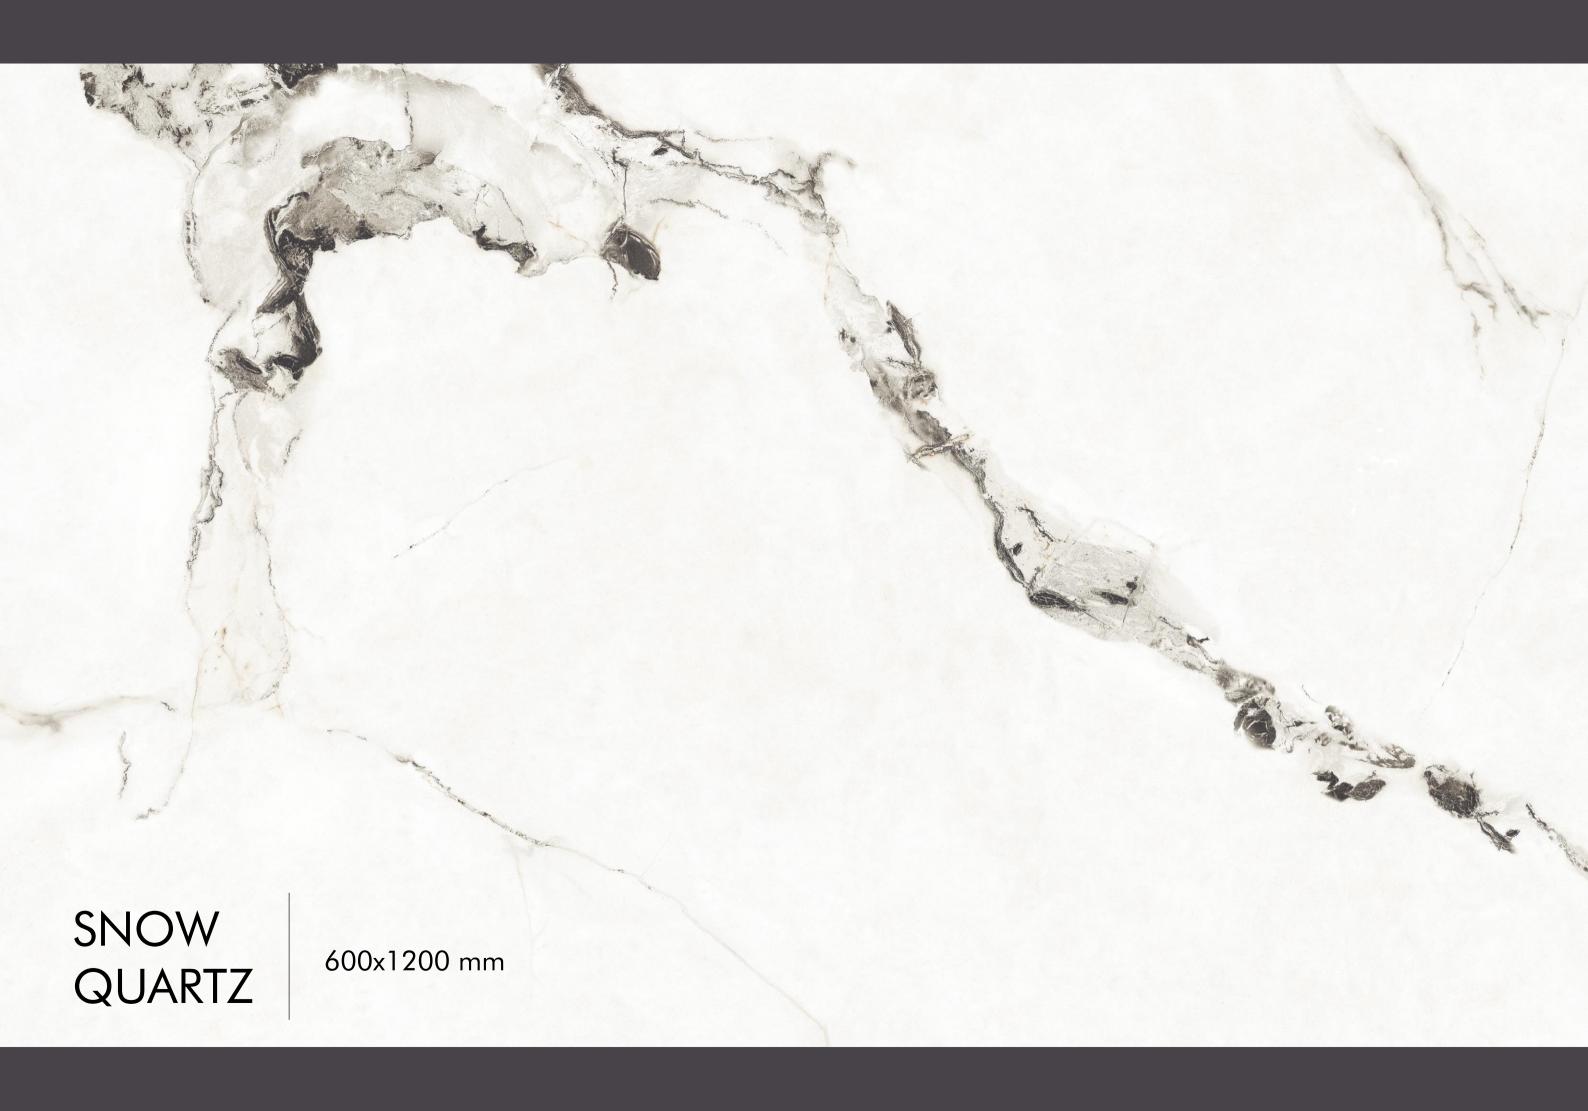

SNOW QUARTZ







Technical Character



Lowest Maintenance Effort



Scratch Resistant



Fire Resistant



Residential Areas

Approach Area



Hotels & Restaurants



Parks & Outdoor



Hygienic Surface



Stain Resistant



Heat Resistant



Commercial Areas



School & Colleges



Public Places



Water Resistant



Impact Resistant



Frost Resistant



Hospitals



Religious Places



Railway Stations



Resistant to Bending





Shops & Malls



Technical Specification

	Test Description	Test Method	ISO Standard 13006 B1A Tiles	Value
	Length & Width	BS EN ISO 10545-2	± 0.6%	±0.3%
<u> </u>	Thickness	BS EN ISO 10545-2	± 5.0%	±3.0%
	Straightness Of Sides	BS EN ISO 10545-2	± 0.5%	±0.3%
	Rectangularity	BS EN ISO 10545-2	± 0.6%	±0.3%
	Surface Flatness	BS EN ISO 10545-2	± 0.5%	±0.3%
	Water Absorption	BS EN ISO 10545-3	≤ 0.5%	≤0.05%
$\left(\begin{array}{c} \downarrow \\ \uparrow \uparrow \uparrow \end{array} \right)$	Breaking Strength	BS EN ISO 10545-4	≤1300N	≤1500N
	Modulus Of Repture	BS EN ISO 10545-4	≤ 35N/mm²	≤ 45N/mm²
	Resistance To Deep Abrasion	BS EN ISO 10545-6	≤ 175mm³	≤ 150mm³
	Liner Thermal Expansion	BS EN ISO 10545-8	≤9x10 ⁻⁸ °C1	≤7x10 ⁻⁶ °C¹
	Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defect	No Visible Defect
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	Frost Resistance	BS EN ISO 10545-12	Frost Proof	Frost Proof
5	Resistance To Chemicals	BS EN ISO 10545-13	No Visible Effect	No Visible Effect

GruppoNueva**

Test Description	Test Method	ISO Standard 13006 B1A Tiles	Value	
Resistance To Stains	BS EN ISO 10545-14	Manufacturer To State Class	Stains Removed Min Class ²	
Colour Resistance	BS EN ISO 10545-16	No Damage	No Damage	
Colour Resistance To UV Light	DIN 51094	No Change in Colour	No Change in Colour	
Scratch Hardness (MOH's Scale)	EN 101	≥ 6 MOH′S	≥7 MOH'S	
Surface Quality	BS EN 10545-2	Min. 95%	No Visible Effect	
Skid Resistance (Friction Co-Efficient)	BS EN 10545-17	≥ 0.4	≥0.4	
Moisture Expansion	_	Nill	Nill	

Packing Details

Format Size	₹ Thickness	骨 Pcs/Box	∰Mq/Box	∰Kg/Box	∰Box/Pallet	∰Mq/Pallet	∰Kg/Pallet
600x1200mm	8.5mm	2 pcs.	1.44	27 Kg.	32	46.08	30 Kg.

DISCLAIMER: We tiles reserve the right to deleted and amend either totally or partially, any of the colors, shape, sizes, references and other technical specification contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please referactual sample before final selection. The details of sizes, colors, references should be verified for typographical errors.

GruppoNueva**

8-A, Lakhdhirpur Road, Beside Narmada Canal, Morbi, Gujarat 363 642

+91 82382 38275

www.grupponueva.com



hello@grupponueva.com